

2 Wire Warden Intercom Phone (S004)

Features

- Compatible with the EV3000 Emergency Warning and Intercommunication System (EWIS)
- Compatible with 3 wire TS004 systems
- 2 Wire connection to EV3000
- 2 Wire connection of the Emergency Alarm Initiating Device (EAID) to the warden intercom phone (WIP)
- Meets AS/ACIF/S004 Audible standard
- Easy access and mounting

Description

Warden Intercom Phones (WIPs) are strategically located within each fire area or zone and form an integral part of the Ampac EV3000 Emergency Warning and Intercommunication System (EWIS).

WIP's are designed for use in emergencies and in conjunction with the Emergency Procedures (EP) of the site.

The WIP is designed to provide a direct phone link to the EWIS system using a continuously monitored, 2 wire cable connection. An Emergency Alarm Initiating Device (EAID) can also be connected to the WIP.

Operation is simple:

To Call	Lift Handset. A tone is heard to confirm EWIS is being called.
To Receive	Built in Buzzer will sound intermittently. Lift Handset
To Terminate	Return handset to cradle

Ease of installation is provided using slotted holes and terminals located within the back of the unit which is accessed through removal of a single screw located within the front panel.



2 Wire Warden Intercom Phone

Item Numbers


219-0015 2 Wire WIP

Specifications

Supply Voltage	27 volts dc. (line driven)
Line Voltage	On hook – 25 volts dc. max Off hook – 14 volts dc. max
Current draw	On hook – 5 mA max Off hook – 35 mA max
Temperature	-20°C to 70°C
Humidity	0-95% non condensing
Line Impedance	600 ohm balanced
Line Level	0 dB (± 3dB)
Audible Call Signal	80 dB(A) @ 1m
Cabling	2 Wire - 2.5mm ² max.
Dimensions	215H x 85W x 62D mm
Approvals	C-tick, AS2220.1

2 Wire Warden Intercom Phone (S004)

Mounting information

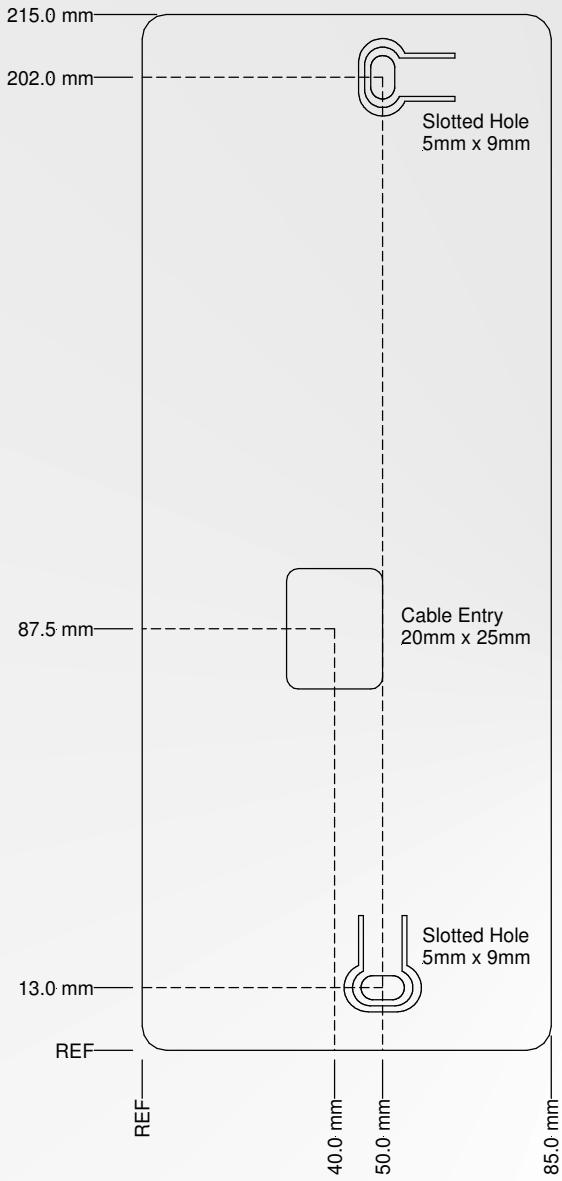

Note: Not to scale



WORLD LEADER OF INNOVATIVE SOLUTIONS
IN FIRE DETECTION AND ALARM SYSTEMS

